

CNV 504N5 SERIES

COUPLING/DECOUPLING NETWORKS FOR 4 SIGNAL/DATA LINES



符合下列标准 ...

- > EN 61000-4-18
- > IEC 61000-4-18

COUPLING/DECOUPLING NETWORKS FOR TESTING MEASURING RELAYS AND PROTECTION EQUIPMENT

The CNV 504N5-series coupling/decoupling networks are used to apply slow damped oscillatory waves onto signal/data lines in accordance to EN/IEC 61000-4-18. A capacitance of 0.5uF is specified to couple the pulses on to the lines. Each line has a decoupling inductor of 1.5mH or 3.0 mH to protect the auxiliary equipment from being subjected to the test pulse. The disturbance signal used for this test is a damped oscillatory pulse with a frequency of 100kHz or 1MHz, being generated by the EM TEST OCS 500N6 or OCS 500N6F.

The CNV 504N5 series supports voltages of up to 250V AC/DC and a current of up to 4A AC/DC.

HIGHLIGHTS

- > Dedicated CDN for the coupling of slow damped oscillatory waves as per EN/IEC 61000-4-18
- > Coupling capacitor 0.5uF
- > Decoupling inductor 1.5 mH for 50 V AC/DC
- > Decoupling inductor 3.0 mH for 250V AC/DC
- > Nominal line current 4A AC/DC

应用领域

-  元器件
-  工业
-  家电

技术细节

MODEL OVERVIEW

AVAILABLE CNV 504N5 MODELS

CNV 504N5.1	50V AC/DC per line
CNV 504N5.3	250V AC/DC per line

TECHNICAL DETAILS

CNV 504N5.1

Nominal voltage	max. 50V AC/DC per line
Nominal current	max. 4A AC/DC per line
Test voltage	max. 3kV peak for 100kHz and 1MHz damped oscillatory waves
Source impedance	200 Ohm whereas 100 Ohm are part of the CNV and 100 Ohm are part of the generator OCS 500N6 series
Decoupling inductor	1.5 mH per line

CNV 504N5.3

Nominal voltage	max. 250V AC/DC per line
Nominal current	max. 4A AC/DC per line
Test voltage	max. 3kV peak for 100kHz and 1MHz damped oscillatory waves
Source impedance	200 Ohm whereas 100 Ohm are part of the CNV and 100 Ohm are part of the generator OCS 500N6 series
Decoupling inductor	3.0 mH per line

GENERAL DATA (ALL MODELS)

OUTPUTS


DUT connectors	4mm safety lab connectors
Dimensions, Weight	250mm x 160mm x 130mm approx. 2.5kg

RECOMMENDED ACCESSORIES

GENERATOR AND OPTIONS FOR EN/IEC 61000-4-18 TESTING

OCS 500N6 series	Damped Oscillatory Wave generator, 100kHz and 1MHz
OCS 500N6F series	Fast Damped Oscillatory Wave generator, with option S-DOW/N6F, 100kHz and 1MHz
iec.control	Remote control and documentation software

实力无处不在

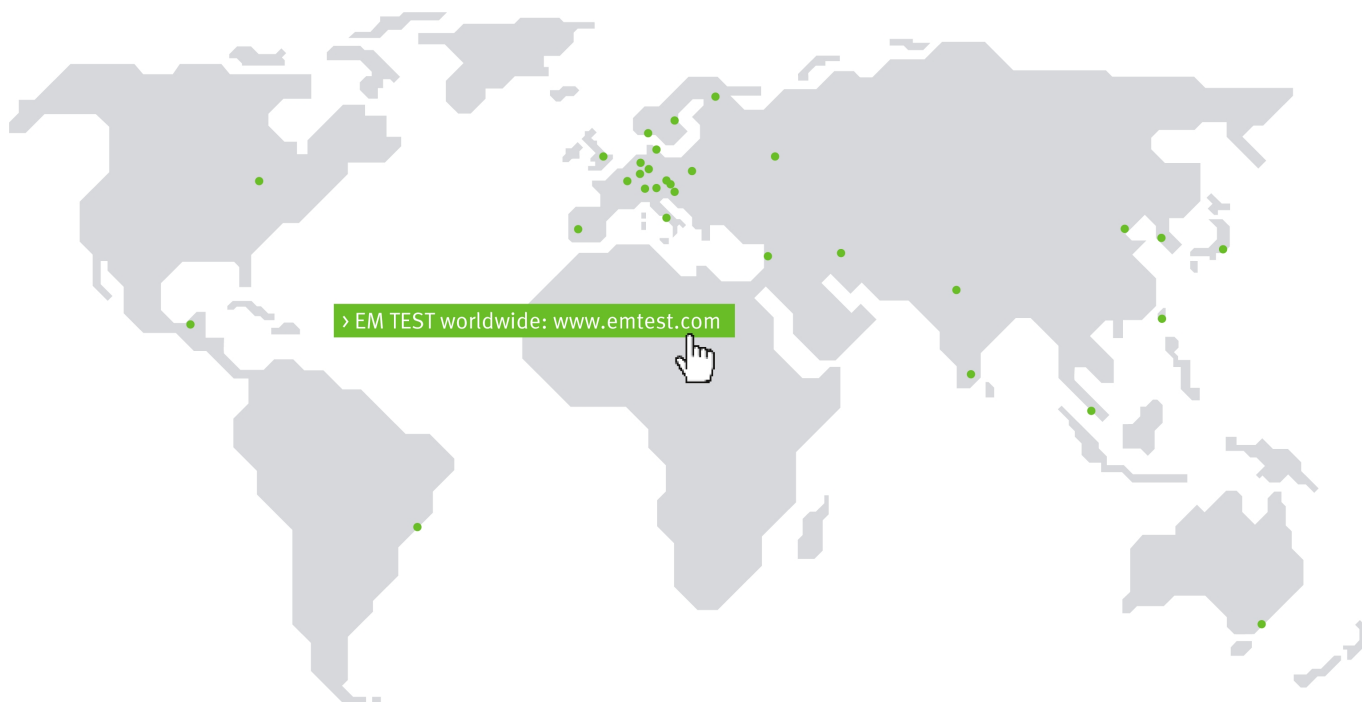

直接联系 EM TEST

瑞士

EM TEST (Switzerland) GmbH > Sternenhofstra e 15 > 4153 Reinach >
Switzerland
电话 +41 (0)61/7179191 > 传真 +41 (0)61/7179199
Internet: www.emtest.ch > 电子邮件: sales.emtest@ametek.com

德国

AMETEK CTS Germany GmbH > Lünener Stra e 211 > 59174 Kamen >
Deutschland
电话 +49 (0)2307/26070-0 > 传真 +49 (0)2307/17050
Internet: www.emtest.com > 电子邮件: info.cts@ametek.de

法国

EM TEST FRANCE > Le Trident - Parc des Collines > Immeuble B1 - Etage 3 >
36, rue Paul Cézanne > 68200 Mulhouse > France
电话 +33 (0)389 31 23 50 > 传真 +33 (0)389 31 23 55
Internet: www.emtest.fr > 电子邮件: info@emtest.fr

波兰

EM TEST Polska > ul. Ogrodowa 31/35, 00-893 Warszawa > Polska
电话 +48 (0)518 64 35 12
Internet: www.emtest.com/pl > 电子邮件: infopolska.emtest@ametek.com

美国 / 加拿大

AMETEK Compliance Test Solutions > 52 Mayfield Ave. > Edison > NJ 08837
电话 +1 (732) 417-0501
Internet: www.emtest.com > 电子邮件: sales.emtest@ametek.com

中国

E & S Test Technology Limited > Rm 913, Leftbank >
No. 68 Bei Si Huan Xi Lu > Haidian District > Beijing 100080 > P.R. China
电话 +86 (0)10 82 67 60 27 > 传真 +86 (0)10 82 67 62 38
Internet: www.emtest.com > 电子邮件: info@emtest.com.cn

Р е с п у б л и к а К о р е я

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong >
Giheung-gu > Yongin-si > Gyeonggi-do > Korea
电话 +82 (31) 216 8616 > 传真 +82 (31) 216 8616
Internet: www.emtest.co.kr > 电子邮件: sales@emtest.co.kr

供货范围、外观设计、技术指标等信息，均于刊印时有效，技术数据如有变化，恕不另行通知。